


A high strength, high conductivity aluminum connector for joining a cable main parallel to a cable tap, the Type EHV PCA includes clamping hardware made of high tensile aluminum for dependability and durability in the field. To facilitate installation and to aid in a corona free performance, all bolt heads are captivated. When placing an order provide the specific conductor size. Example: 110-123-EHV(3500AAC)

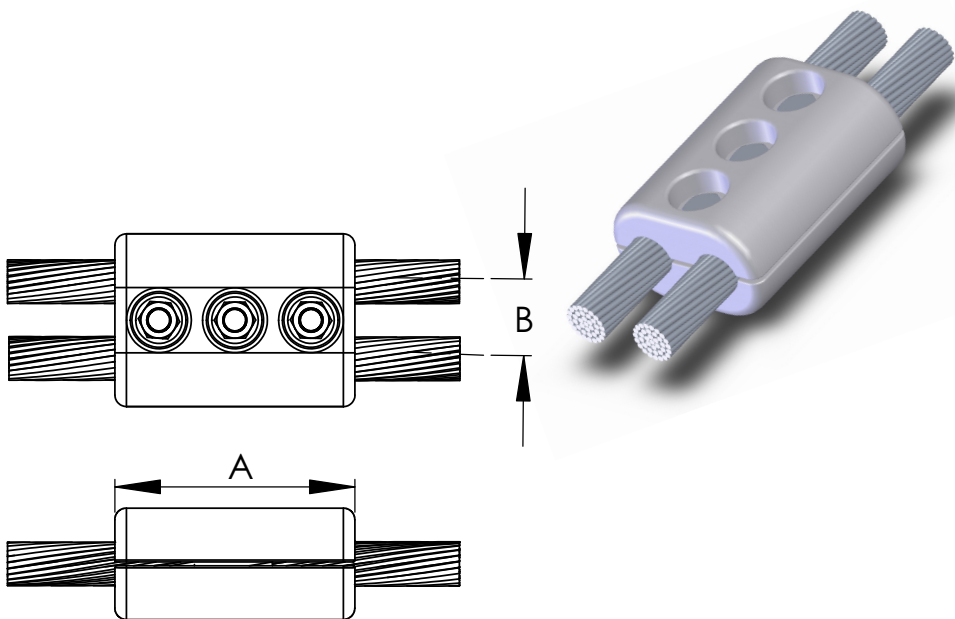

\* Specify specific conductor size.

BOLTED EHV PARALLEL CONNECTORS, CABLE TO CABLE					
CATALOG NUMBER	DIMENSIONS IN INCHES				
	AAC	ACSR	DIA.	A	B
110-117-345KV(*)	600-900	477-795	.953-1.162	8 1/4	4
110-119-EHV(*)	900-1272	795-1113	1.094-1.364	8 1/2	4 1/4
110-121-EHV(*)	1272-1590	1113-1431	1.289-1.547	8 3/4	4 1/2
110-123-EHV(*)	1590-3500	1431-2156	1.459-2.16	9 3/4	5

Dimensions may vary depending on specific conductor size.