


The pad to pad bifurcating connectors are cast of a high strength aluminum alloy and are capable of providing a corona free environment up to 500KV. Mounting hardware and hardware shields are available but must be ordered separately. To achieve a corona free environment, bolt shields must be used. Contact sealant is recommended. To obtain a connector with the single pad rotated 90 degrees use the prefix "BATV". Example: BATV-12-EHV.

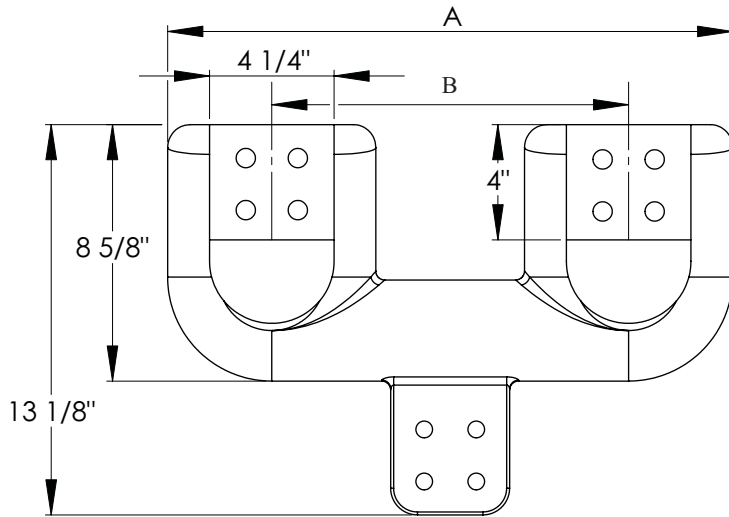

"Use prefix BATV"

| BIFURCATING CONNECTORS SINGLE TO DOUBLE FLAT PADS | | |
|---|----------------------|----|
| CATALOG NUMBER | DIMENSIONS IN INCHES | |
| | A | B |
| BAT-12-EHV | 18 | 12 |
| BAT-18-EHV | 24 | 18 |